


# FASTFIX COMPOSITE INSULATED FLOOR SERIES

FastFix floor panels come in a range of thicknesses to suit different spanning requirements and meet desired thermal and acoustic values. All floor panels are lined with 6mm fibre cement boards that are thermally bonded to the core, and have thick steel hollow beams embedded within the panel. The 65mm floor panel has a steel tongue and groove interlocking joining system, while the 100mm and 150mm thick floor panels utilise a removable C channel to fix together.

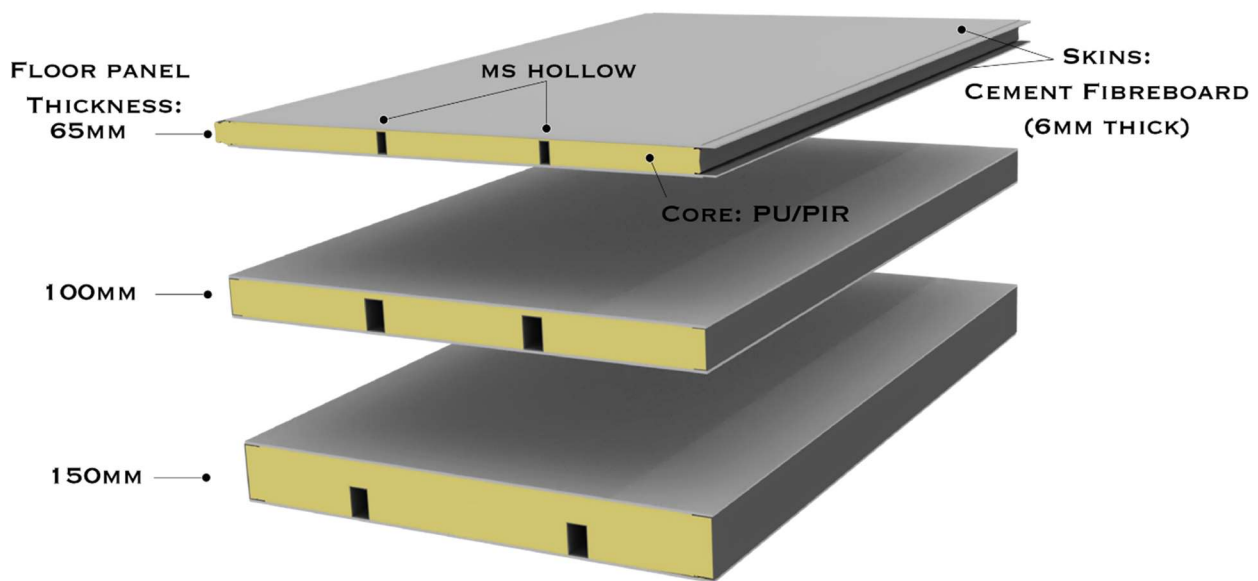

	Thickness	Width	Height	Weight	Thermal (R) Value
<i>Floor Panel 65</i>	65mm	1220mm	Up to 6m	24kg/m <sup>2</sup>	3.0
<i>Floor Panel 100</i>	100mm	1220mm	Up to 9m	30kg/m <sup>2</sup>	4.9
<i>Floor Panel 150</i>	150mm	1220mm	Up to 9m	40kg/m <sup>2</sup>	7.7