



# FASTFIX COMPOSITE INSULATED WALL SERIES

FastFix Wall panels come in a 132mm thick double wall panel and a 65mm thick single wall panel. Both panels are designed as external and internal walls respectively but can be utilised as building components for a variety of construction uses. The wall panels are lined with fibre cement boards with a steel tongue and groove interlocking joining system. The Double wall panel that serves as an external wall has offset joints to ensure there is no thermal bridging. This thermal efficiency is a feature that conventional systems such as masonry and stud wall systems lack, subsequently transferring heat or cold throughout the system.

### FastFix Single Wall

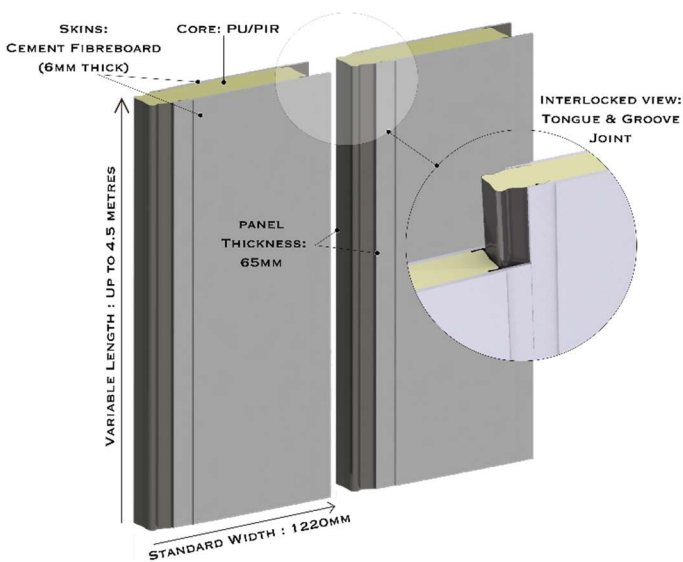

### FastFix Double Wall

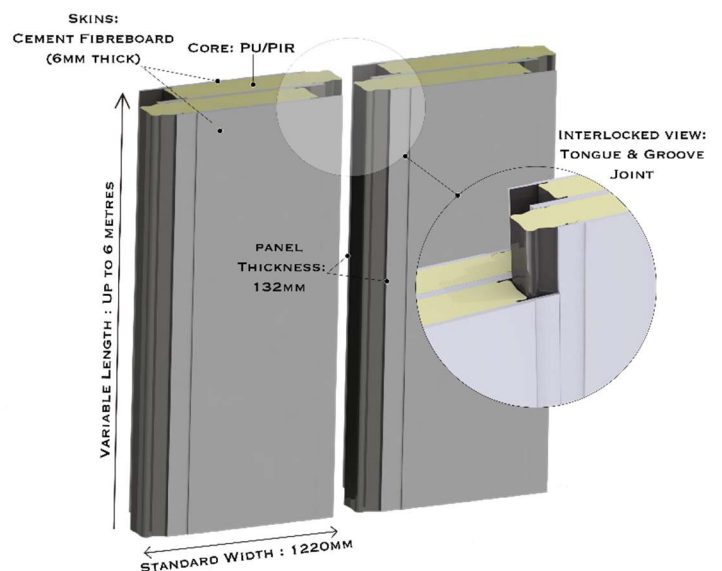

	Thickness	Width	Height	Weight	Thermal (R) Value
Single Wall Panel	65mm	1220mm	Up to 4.5m	20.2kg/m <sup>2</sup>	3.0
Double Wall Panel	132mm	1220mm	Up to 4.5m	40.4kg/m <sup>2</sup>	6.0